

WAAS
CH 90440
W13A

APP CRS
134°

Rwy Idg
TDZE 669
Apt Elev 674

RNAV (GPS) RWY 13

ANDREWS UNIVERSITY AIRPARK (C20)

⚠


NA

Rwy 13 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Procedure NA at night. Use Benton Harbor altimeter setting; when not received, use South Bend Int altimeter setting and increase all MDA 40 feet. Increase LP and LNAV Cats C/D visibility ½ SM and Circling Cats B/C ¼ SM.

MISSED APPROACH: Climb to 3000 direct AUSTJ and hold.

SOUTH BEND APP CON ★
118.55 257.8

UNICOM
122.7 (CTAF) 0

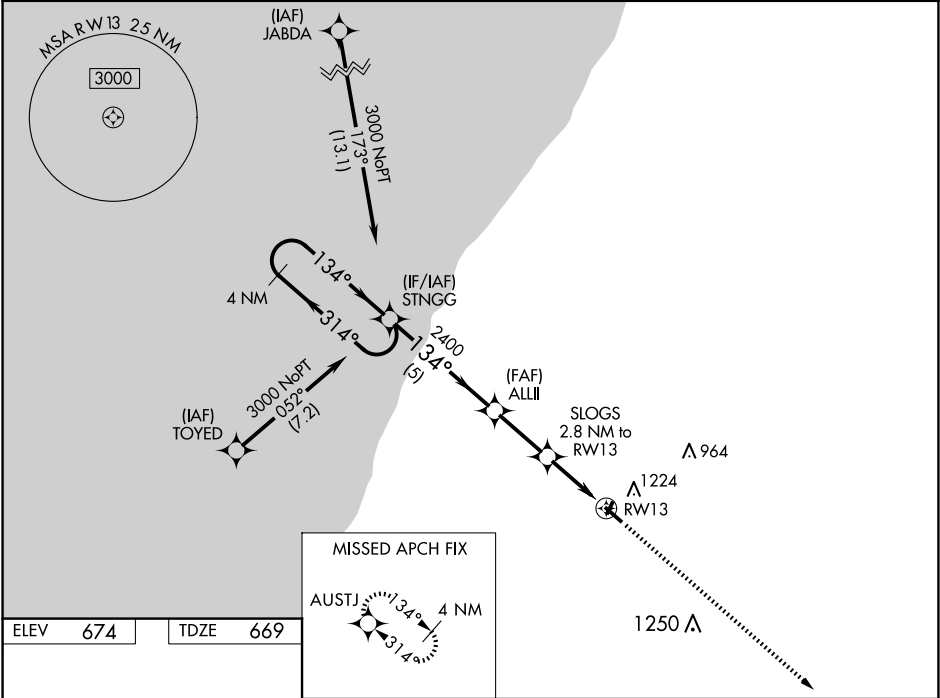

ELEV 674

TDZE 669

134°

13

2288 x 180

4148 x 70

4 NM Holding Pattern

STNGG

ALLII

3000

134°

134°

2400

1600

3000

AUSTJ

5 NM

2.5 NM

2.8 NM

RWY 13

CATEGORY	A	B	C	D
LP MDA	1100-1	431 (500-1)	1100-1¼	431 (500-1¼)
LNAV MDA	1280-1	611 (700-1)	1280-1¾	611 (700-1¾)
CIRCLING	1620-1¼	946 (1000-1¼)	1620-2¾ 946 (1000-2¾)	1620-3 946 (1000-3)

LURL Rwy 13-31 0

3000

AUSTJ

EC-1, 20 MAR 2025 to 17 APR 2025

EC-1, 20 MAR 2025 to 17 APR 2025