

| | | | |
|---------------------------------|------------------------|-----------------------------|---|
| WAAS CH 58033 W16A | APP CRS 159° | Rwy Idg TDZE Apt Elev | 4007 1368 1368 |
|---------------------------------|------------------------|-----------------------------|---|




RNAV (GPS) RWY 16

WADENA MUNI (ADC)

⚠ DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. VDP and Baro-VNAV NA with Staples altimeter setting. When local altimeter setting not received, use Staples altimeter setting and increase all DA 52 feet and all MDA 60 feet, increase LNAV/VNAV visibility 1/8 mile, LNAV Cat C visibility 1/4 mile and Circling Cat C visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (1°F) or above 54°C (130°F).

MISSED APPROACH:
Climb to 3300 direct JOLIT and hold.

| | | | |
|----------------------------|--|-----------------------|---------------------------------|
| AWOS-3PT 118.875 | MINNEAPOLIS CENTER 126.1 269.2 | GCO 121.725 | UNICOM 122.8 (CTAF) 0 |
|----------------------------|--|-----------------------|---------------------------------|

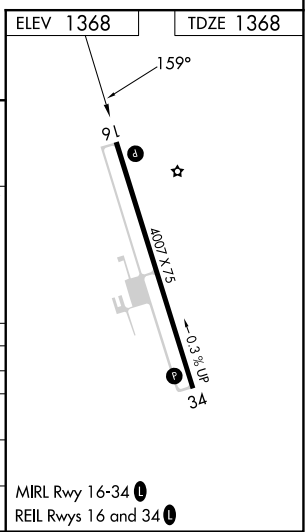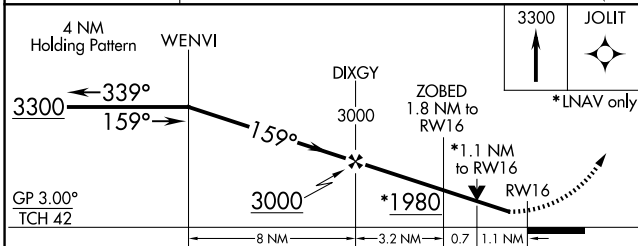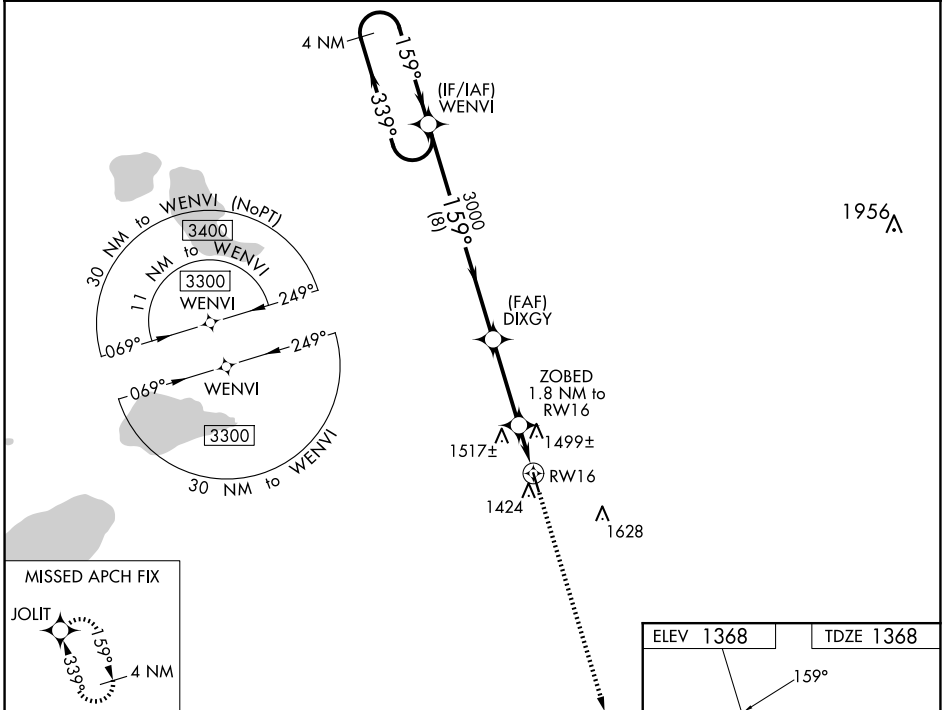

| CATEGORY | A | B | C | D |
|-------------------|-----------------------|-----------------------|-------------------------------|----|
| LPV DA | 1631-1 | 263 (300-1) | | NA |
| LNAV/VNAV DA | 1767-1 3/8 | 399 (400-1 3/8) | | NA |
| LNAV MDA | 1760-1 | 392 (400-1) | 1760-1 1/8 392 (400-1 1/8) | NA |
| C CIRCLING | 1780-1 412 (500-1) | 1820-1 452 (500-1) | 1940-1 1/2 572 (600-1 1/2) | NA |

NC-1, 17 APR 2025 to 15 MAY 2025

NC-1, 17 APR 2025 to 15 MAY 2025