

25051

RNAV (GPS) PRM RWY 27L
(SIMULTANEOUS CLOSE PARALLEL)
HARTSFIELD/JACKSON ATLANTA INTL (ATL)


WAAS CH 65700 W27A	APP CRS 275°	Rwy Idg 8865 TDZE 999 Apt Elev 1026
--	------------------------	--

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous close parallel approach authorized with LMS PRM and RNAV PRM Rwy 26R or 26L or 28, or Rwy 26R and 28, or Rwy 26L and 28. Dual VHF Comm required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. See additional requirements on AAUP.


ALSF-2




MISSED APPROACH: Climb to 4000 direct CALUP and on track 272° to TEMPO and hold.

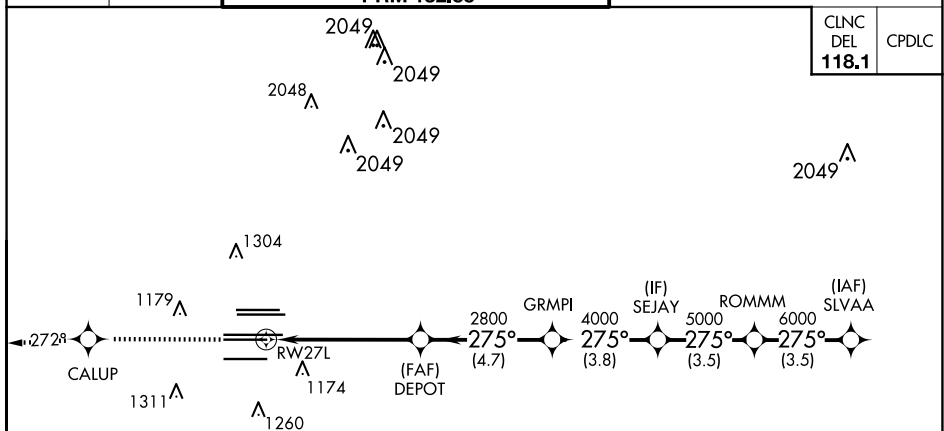[illegible]

MISSED APCH FIX





ELEV	1026	D	TDZE	999
------	------	----------	------	-----

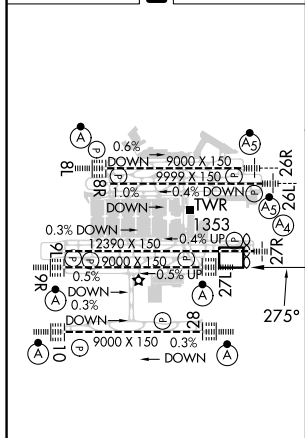

HIRL all Rwy's
TDZ/CL Rwy's 8L, 9R, 10, 26R,
27L and 28

RADAR REQUIRED



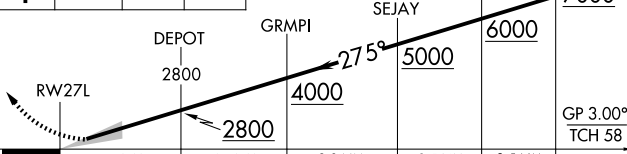4000	CALUP	tr 272°	TEMPO △	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 79).					
									
CATEGORY	A		B		C		D		
LPV DA	1199/18				200 (200-½)				
RNAV/ VNAV	DA	1528-1⅓				529 (600-1⅓)			

ATLANTA, GEORGIA
Orig-A 12OCT17

33°38'N-84°26'W

HARTSFIELD/JACKSON ATLANTA INTL (ATL)

RNAV (GPS) PRM RWY 27L (SIMULTANEOUS CLOSE PARALLEL)

SE-4, 15 MAY 2025 to 12 JUN 2025

SE-4, 15 MAY 2025 to 12 JUN 2025