
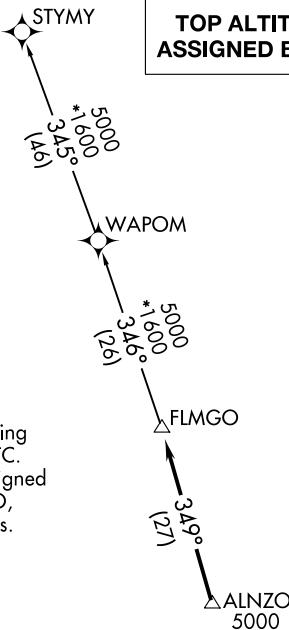


FLMGO TWO DEPARTURE(RNAV)

HOMESTEAD ARB (KHST)
HOMESTEAD, FLORIDA

| | | | |
|---|-------|----------------------------------|---|
| RNAV 1 - DME/DME/IRU or GPS. RADAR required. | STYMY | TOP ALTITUDE: ASSIGNED BY ATC | MIAMI DEP CON 125.5 354.1 ATIS★ 132.275 269.9 CLNC DEL 121.75 275.8 GND CON 121.75 275.8 HOMESTEAD TOWER 133.45 279.55 |
|---|-------|----------------------------------|---|



NOTE: Jet aircraft only.

NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.


NOTE: WAPOM Transition ATC assigned except aircraft landing: MCO, DAB, and MLB terminal areas.

TAKEOFF MINIMUMS

Rwy 6: Standard with minimum climb of 500'/NM to 1800.

Rwy 24: Standard with minimum climb of 500'/NM to 2200.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6: Climb on heading 055° or as assigned by ATC for RADAR vectors to cross ALNZO at or above 5000, thence. . . .

TAKEOFF RUNWAY 24: Climb on heading 235° or as assigned by ATC for RADAR vectors to cross ALNZO at or above 5000, thence. . . .

. . . . on track 349° to FLMGO, then on assigned transition. Maintain ATC assigned altitude. Expect filed altitude within 10 minutes after departure.

STYMY TRANSITION (FLMGO2.STYMY)WAPOM TRANSITION (FLMGO2.WAPOM)FLMGO TWO DEPARTURE(RNAV)
(FLMGO2.FLMGO) 21MAR24HOMESTEAD, FLORIDA
HOMESTEAD ARB (KHST)