


WAAS CH 86231 W16A	APP CRS 156°	Rwy Idg TDZE 1459 Apt Elev 1478
--	------------------------	---


RNAV (GPS) RWY 16
TAYLOR COUNTY (MDZ)

RNP APCH.	When local altimeter setting not received, use Merrill altimeter setting and increase all MDA 100 feet and increase all Cat C/D visibility ¼ mile. Rwy 16 helicopter visibility reduction below ¾ SM NA. VDP NA when using Merrill altimeter setting.	MISSED APPROACH: Climb to 4000 direct HAXAN and hold.
-----------	---	--

AWOS-3 119.025	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

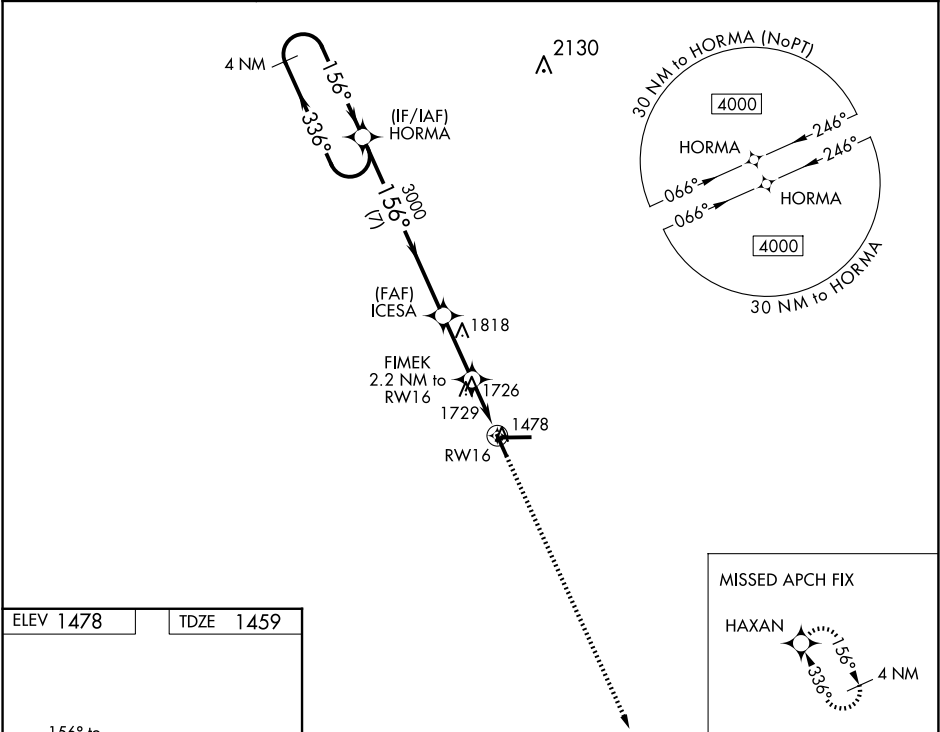

ELEV 1478	TDZE 1459
------------------	------------------



4 NM Holding Pattern				VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 37).				4000	HAXAN
4000 ← 336°				156° →					
156°				156°					
3000				ICESA				FIMEK 2.2 NM to RW16	
3.00° TCH 45				2200				1.7 NM to RWY16	
7 NM				2.5 NM				0.5 NM 1.7 NM	
CATEGORY	A		B		C		D		
LP MDA	2040-1 581 (600-1)				2040-1¾ 581 (600-1¾)				
LNAV MDA	2060-1 601 (600-1)				2060-1¾ 601 (600-1¾)				
CIRCLING	2060-1 582 (600-1)				2060-1¾ 582 (600-1¾)		2180-2¼ 702 (800-2¼)		

REIL Rws 9, 27 and 34 0
MIRL Rws 9-27 and 16-34 0

EC-3, 15 MAY 2025 to 12 JUN 2025

EC-3, 15 MAY 2025 to 12 JUN 2025