

APP CRS
314°

Rwy Idg 11247
TDZE 13
Apt Elev 13

RNAV (RNP) Z RWY 31L


JOHN F KENNEDY INTL (JFK)

RNP AR APCH.


For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations.

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct FRNKY and on track 202° to CHANT and hold.

D-ATIS (ARR/DEP)(ARR-NE) (ARR-SW)	NEW YORK APP CON	KENNEDY TOWER	GND CON	CLNC DEL	CPDLC
128.725 117.7 115.4	128.125 269.0	Rwys 4R/22L and 13L/31R 119.1 281.55 Rwys 4L/22R and 13R/31L 123.9 281.55	121.9 348.6	135.05 348.6	

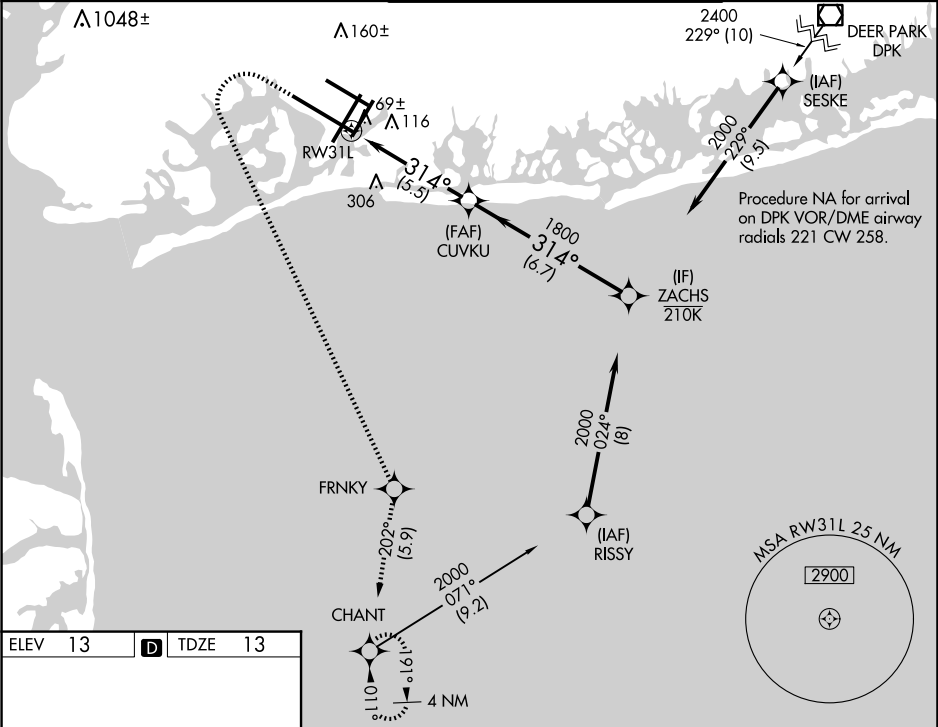

ELEV 13	D	TDZE 13
---------	---	---------

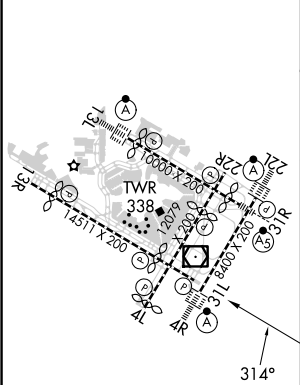

RLLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

500

3000

FRNKY

CHANT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

314°

202°

314°

5.5 NM

6.7 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	410-1%	397 (400-1%)		

AUTHORIZATION REQUIRED