

HOUSTON, TEXAS

AL-5461 (FAA)

24305

WAAS CH 69626 W27A	APP CRS 267°	Rwy Idg 10000 TDZE 86 Apt Elev 96
--	------------------------	--

RNAV (GPS) Z RWY 27
GEORGE BUSH INTCNL/HOUSTON (IAH)

RNP APCH.

V Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to RVR 6000, and LNAV Cats C, D and E visibility to 1% SM.

ALSF-2




MISSED APPROACH: Climb to 560 then climbing left turn to 3100 direct TICOY and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 EAST 124.35 316.15 WEST	HOUSTON TOWER 135.15 290.2	GND CON 118.575	CLNC DEL 128.1	CPDLC
-------------------------	--	--------------------------------------	---------------------------	--------------------------	-------

A 2049



ELEV 96	D	TDZE 86
---------	----------	---------

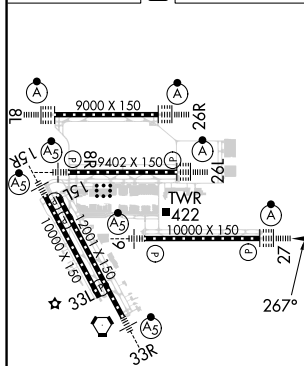

TDZ/CL Rwy's 8R, 8L, 15R, 26R, 26L,
27 and 33L
HURL all Rwy's

VGS and RNAV glidepath not coincident
(VGS Angle 3.00/TCH 70).

*LNAV only.

*1.3 NM to RW27

REDOC 1500

FESTA 2000

DENTO 2000

TRANN 3000

GP 3.00°
TCH 55

1.3 3 NM 4.4 NM 7.2 NM 4.2 NM

267°

CATEGORY	A	B	C	D	E
LPV DA		286/18	200 (200-1/2)		
LNAV/VNAV DA		476/35	390 (400-5/8)		
LNAV MDA	560/24	474 (500-1/2)	560/50	474 (500-1)	

HOUSTON, TEXAS
Amdt 5B 22APR21

GEORGE BUSH INTCNTL/HOUSTON (IAH)

29°59'N-95°20'W

RNAV (GPS) Z RWY 27

SC-5, 12 JUN 2025 to 10 JUL 2025

SC-5, 12 JUN 2025 to 10 JUL 2025