


TACAN RWY 13

TACAN CVS Chan 53	APCH CRS 120°	Rwy Ldg 8194 TDZE 4294 Arpt Elev 4295	[USAF]	CANNON AFB (KCVS)
Missed approach requires use of RNAV or RADAR monitoring.			SSALR (A3)	MISSED APPROACH: Climb to 6000 out CVS TACAN R-130 to 5.6 DME (HOMEP) then turn right climbing to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.
▼ * When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1¾ miles.				
ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	CANNON TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225

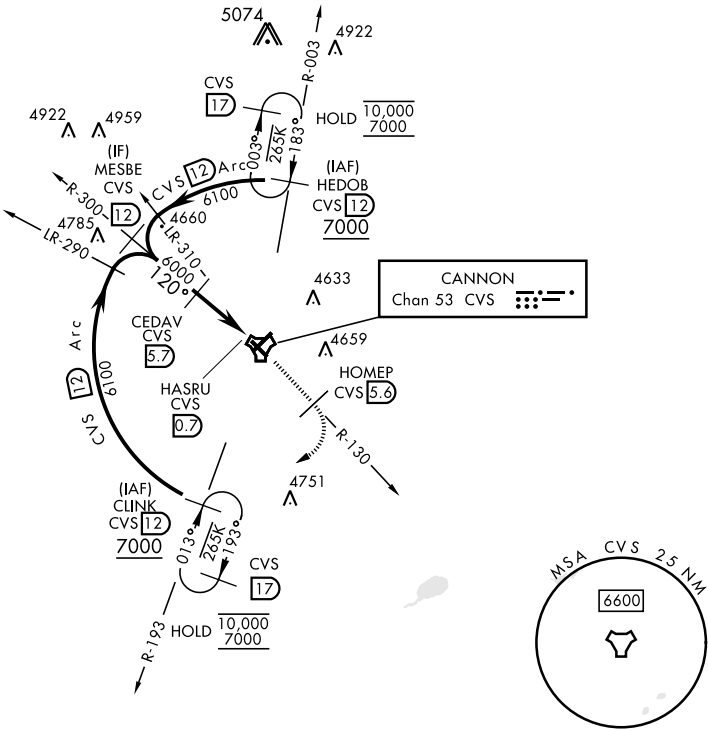

EMERG SAFE ALT 100 NM 9000

					ELEV 4295	TDZE 4294
CATEGORY	A	B	C	D	E	
S-13*	4800-¾	506 (600-¾)	4800-1	506	(600-1)	
CIRCLING	4840-1	545 (600-1)	4860-1½	5000-2¼	5020-2½	
			565 (600-1½)	705 (800-2¼)	725 (800-2½)	
					HIRL all rwys	

TACAN RWY 13

SW-1, 27 NOV 2025 to 25 DEC 2025

SW-1, 27 NOV 2025 to 25 DEC 2025