

WAAS
CH **86447**
W15A

APP CRS
149°

Rwy Ldg
TDZE
Apt Elev
3848
805
811


RNAV (GPS) RWY 15
INDIANAPOLIS METRO (UMP)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using IND altimeter setting. Rwy 15 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use IND altimeter setting and increase LPV DA to 1098 feet. Increase LNAV/VNAV DA to 1173 feet; increase all MDAs 60 feet and LNAV visibility Cat C ½ SM.

MISSED APPROACH:
Climb to 2900 direct INOYO and hold.

AWOS-3PT 119.375	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 121.625	UNICOM 123.0 (CTAF) 0
----------------------------	---	----------------------------	--

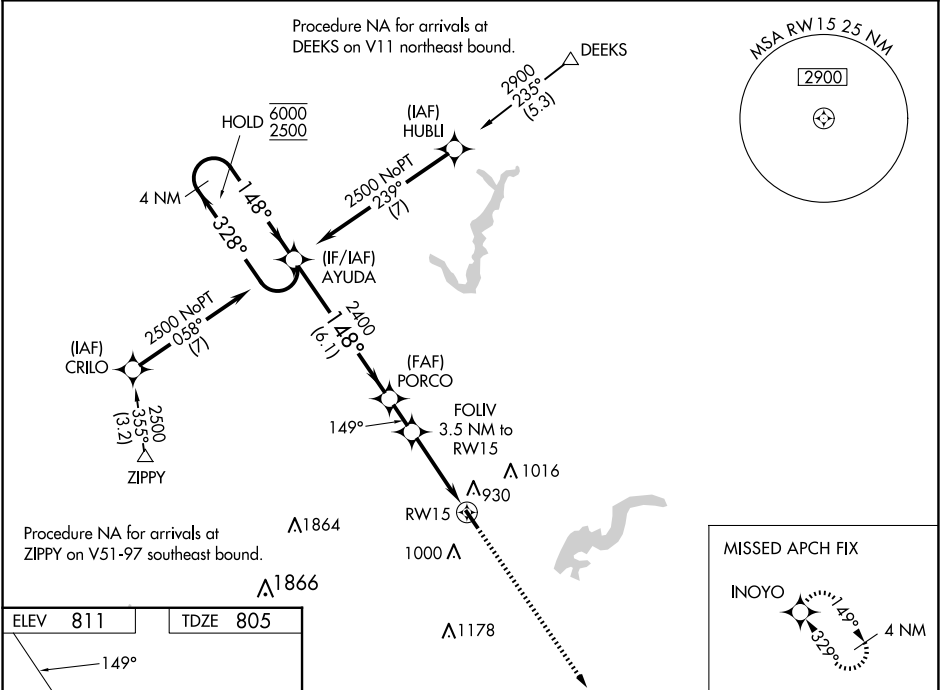

ELEV 811 TDZE 805

MIRL Rwy 15-33 **0**
REIL Rwy 15 and 33 **0**

4 NM Holding Pattern				2900	INOYO
CATEGORY	A	B	C	D	
LPV DA	1055-1		250 (300-1)	NA	
LNAV/VNAV DA	1130-1		325 (400-1)	NA	
LNAV MDA	1240-1	435 (500-1)	1240-1¼ 435 (500-1¼)	NA	
CIRCLING	1320-1 509 (600-1)	1340-1 529 (600-1)	1340-1½ 529 (600-1½)	NA	