

WAAS CH 45626 W26A	APP CRS 246°	Rwy Idg 6543 TDZE 396 Apt Elev 400
--	------------------------	---

RNAV (GPS) RWY 26


BLYTHE (BLH)

**T
A**


When local alimeter setting not received, procedure NA.
DME/DME RNP-0.3 NA. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.
#Missed approach requires a minimum climb of 375 feet per NM to 3500.
*Missed approach requires a minimum climb of 345 feet per NM to 3500.

MISSED APPROACH: Climbing right turn to 5400 direct ROGBE and hold, continue climb-in-hold to 5400.

ASOS 120.175	LOS ANGELES CENTER 128.15 285.6	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

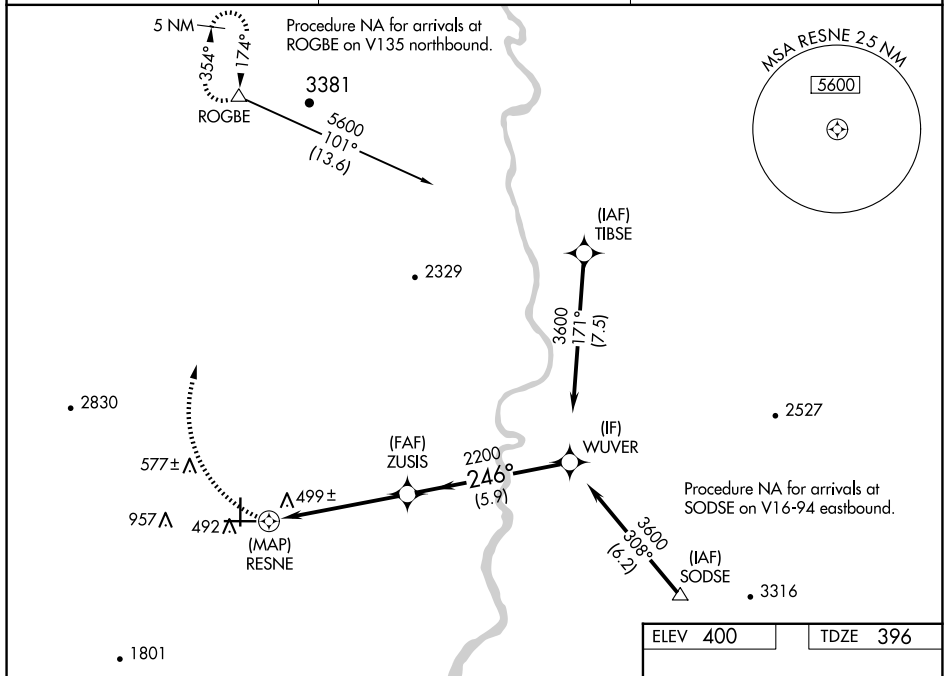

ELEV 400	TDZE 396
----------	----------

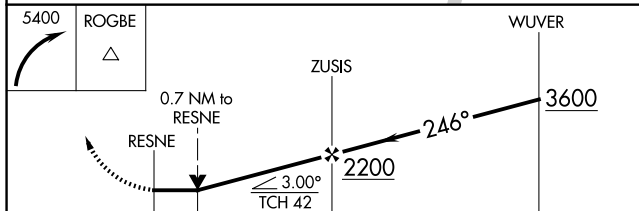

	0.5	0.7	4.4 NM	5.9 NM	
CATEGORY	A		B	C	D
*LP MDA	800-1 404 (400-1)		800-1½ 404 (400-1½)		
LP MDA	1940-1¼ 1544 (1600-1¼)	1940-1½ 1544 (1600-1½)	1940-3 1544 (1600-3)		
#LNAV MDA	800-1 404 (400-1)		800-1½ 404 (400-1½)		
LNAV MDA	2060-1¼ 1664 (1700-1¼)	2060-1½ 1664 (1700-1½)	2060-3 1664 (1700-3)		
CIRCLING	2060-1¼ 1660 (1700-1¼)	2060-1½ 1660 (1700-1½)	2060-3 1660 (1700-3)		

