

LOM	SL	APP CRS	Rwy Ldg	12300
344		353°	TDZE	1271
			Apt Elev	1288

NDB RWY 35
SALINA RGNL (SLN)


⚠

Cat D Circling NA southwest of runway 12-30. For inap ALS, increase S-35 Cats A/B visibility to 1 SM and Cats C/D to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct SLN VORTAC and hold.

ATIS	KANSAS CITY CENTER	SALINA TOWER ★	GND CON	UNICOM
120.15	134.9 363.2	119.3 (CTAF) 257.7	121.9 360.8	122.95

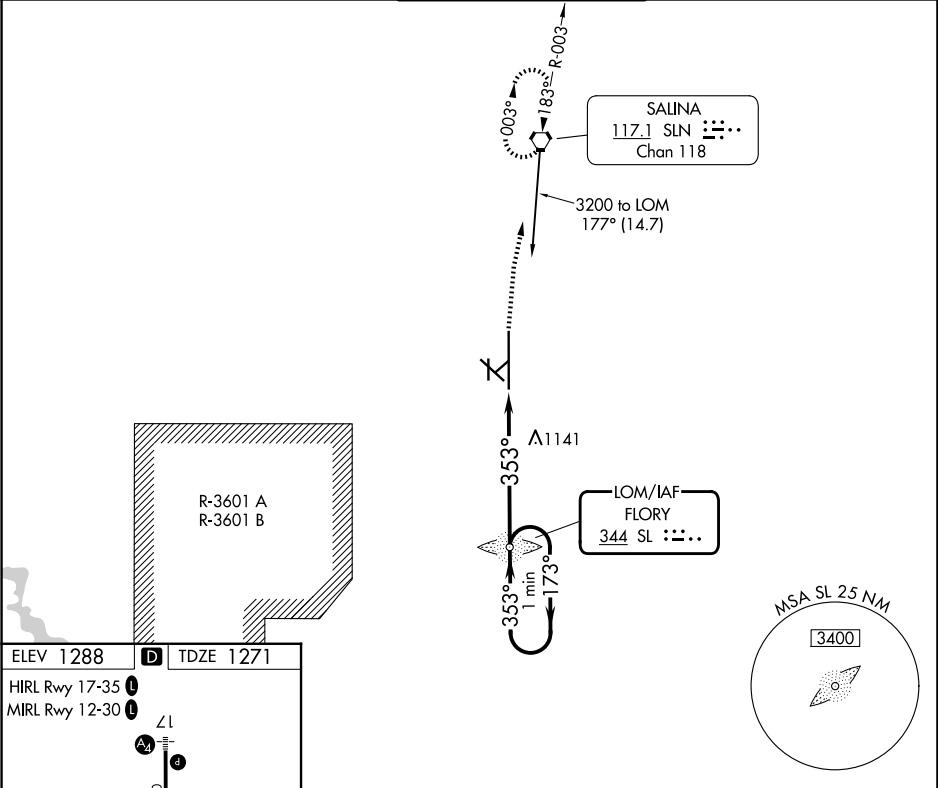


ELEV 1288 **D** TDZE 1271

HIRL Rwy 17-35 **L**
MIRL Rwy 12-30 **L**

353°

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

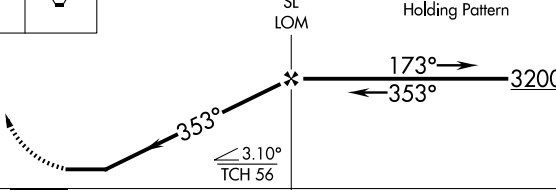3000	SLN	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 48).			
		One Minute Holding Pattern  SL LOM 173° 3200 353° 3.10° TCH 56 5.7 NM			
CATEGORY	A	B	C	D	
S-35	1760-¾	489 (500-¾)	1760-1 489 (500-1)	1760-1¼ 489 (500-1¼)	
CIRCLING	1820-1 532 (600-1)	1840-1 552 (600-1)	1860-1½ 572 (600-1½)	1860-2 572 (600-2)	