


VORTAC LAS 116.9 Chan 116	APP CRS 262°		26L	26R
		Rwy Ldg	10526	12638
		TDZE	2069	2067
		Apt Elev	2181	2181


VOR RWY 26L/R

HARRY REID INTL (LAS)

	For inop ALS, increase S-26L and S-26R Cat D visibility 1/4 SM.		MALSF Rwy 26L	MALS Rwy 26R	MISSED APPROACH: Climb to 4000 then climbing left turn to 6000 on heading 074° and BLD R-270 to BLD VORTAC and hold.			
D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER			GND CON		CNLC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R				118.0	

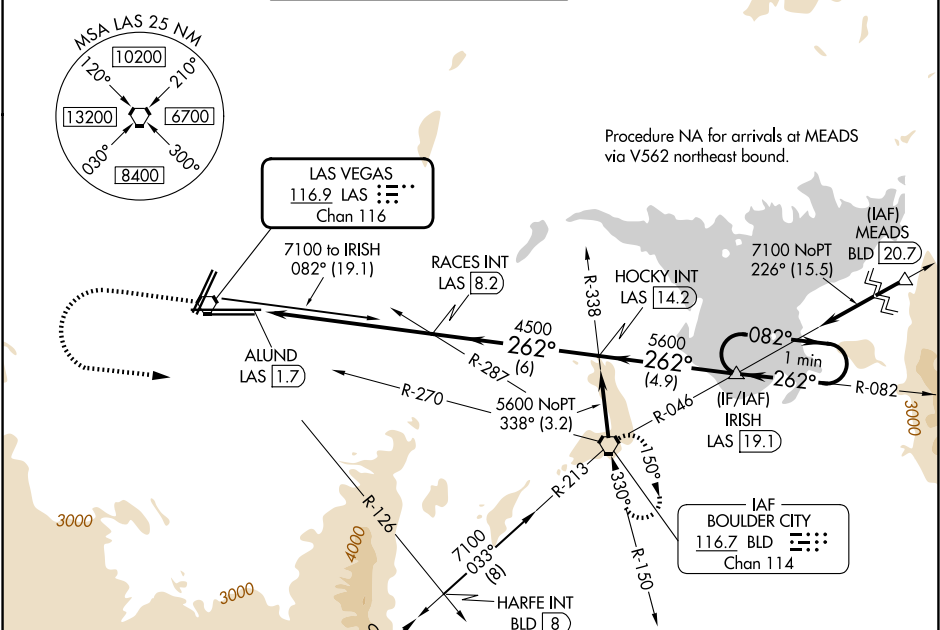

ELEV 2181	D	TDZE 26L 2069
		TDZE 26R 2067



REIL Rwy 1R, 8R, 19L and 19R					
MIRL Rwy 1R-19L					
HIRL Rwy 1L-19R, 8L-26R and 8R-26L					
FAF to MAP 6.5 NM					
Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10