
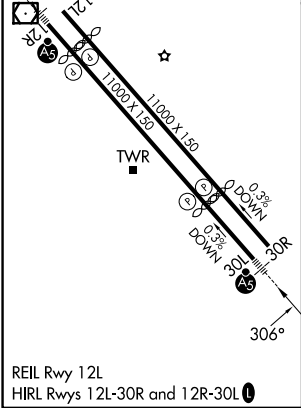


LOC/DME I-SJC	30L 30R
110.9	7614 7597
Chan 46	TDZE 57 55
	Apr Elev 62 62

ILS or LOC RWY 30L
NORMAN Y MINETA SAN JOSE INTL (SJC)

RNAV 1-GPS or RADAR required for procedure entry. DME required. From BORED: RNAV 1-GPS required.	MALSR Rwy 30L	MISSED APPROACH: Climb to 1900 on SJC VOR/DME R-303 to ARTAQ INT/SJC 7 DME and hold.
# RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS 126.95	NORCAL APP CON 120.1 290.25	SAN JOSE TOWER ★ 124.0 (CTAF) 257.6	GND CON 121.7	UNICOM 122.95
-------------------------	---------------------------------------	---	-------------------------	-------------------------

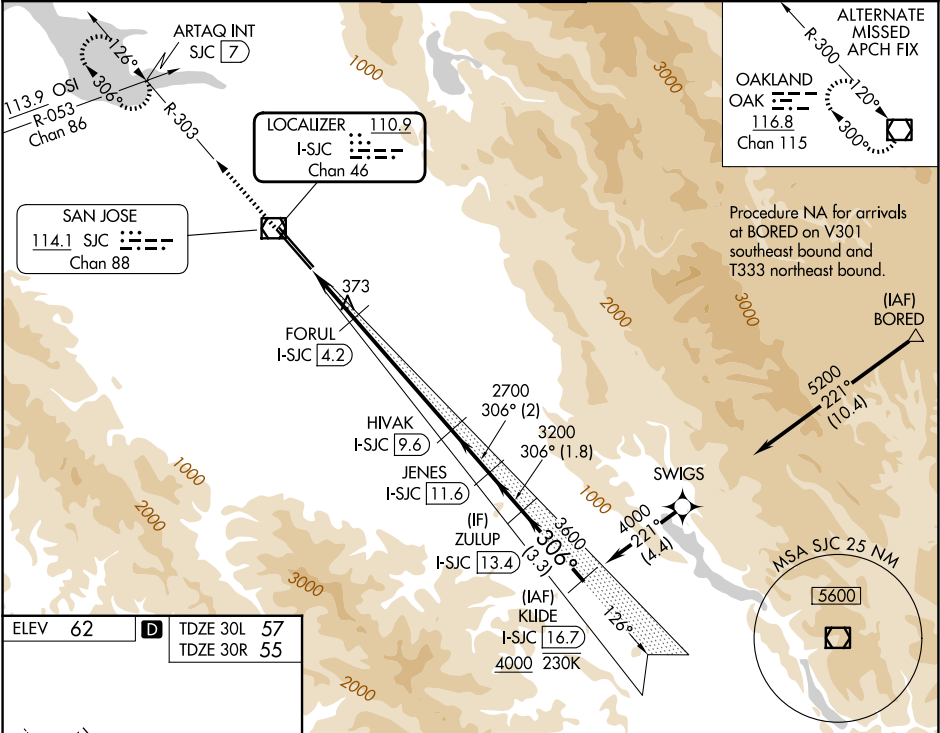

1900	ARTAQ INT	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).	ZULUP I-SJC 13.4	KLIIDE I-SJC 16.7
SJC R-303	FORUL I-SJC 4.2	HIAK I-SJC 9.6	JENES I-SJC 11.6	4000
*LOC only	*I-SJC 3	2700	3200	3600
I-SJC 1.4	I-SJC 1.4	1000*	2700	3600
1.6 NM	1.2 NM	5.3 NM	2 NM	1.8 NM
3.3 NM				
CATEGORY	A	B	C	D
S-ILS 30L#	257/24 200 (200-1/2)			
S-LOC 30L	640/24	583 (600-1/2)	640-1 1/4	583 (600-1 1/4)
SIDESTEP 30R	640-1	585 (600-1)	640-1 3/4	585 (600-2)