

BELOIT, KANSAS

AL-6560 (FAA)

25247

APP CRS 354°	Rwy Ldg TDZE Apt Elev	4200 1416 1418
------------------------	-----------------------------	---

RNAV (GPS) RWY 35

MORITZ MEML (K61)

RNP APCH - GPS.

T VDP NA when using CNK altimeter setting. Rwy 35 helicopter visibility reduction
A NA below $\frac{3}{4}$ SM NA. Circling NA to Rwy 4 and 22. When local altimeter setting
not received, use CNK altimeter setting and increase all MDAs 60 feet.

MISSED APPROACH: Climb to 4000
direct CADAD and hold.

AWOS-3PT 118.225	KANSAS CITY CENTER 134.9 363.2	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

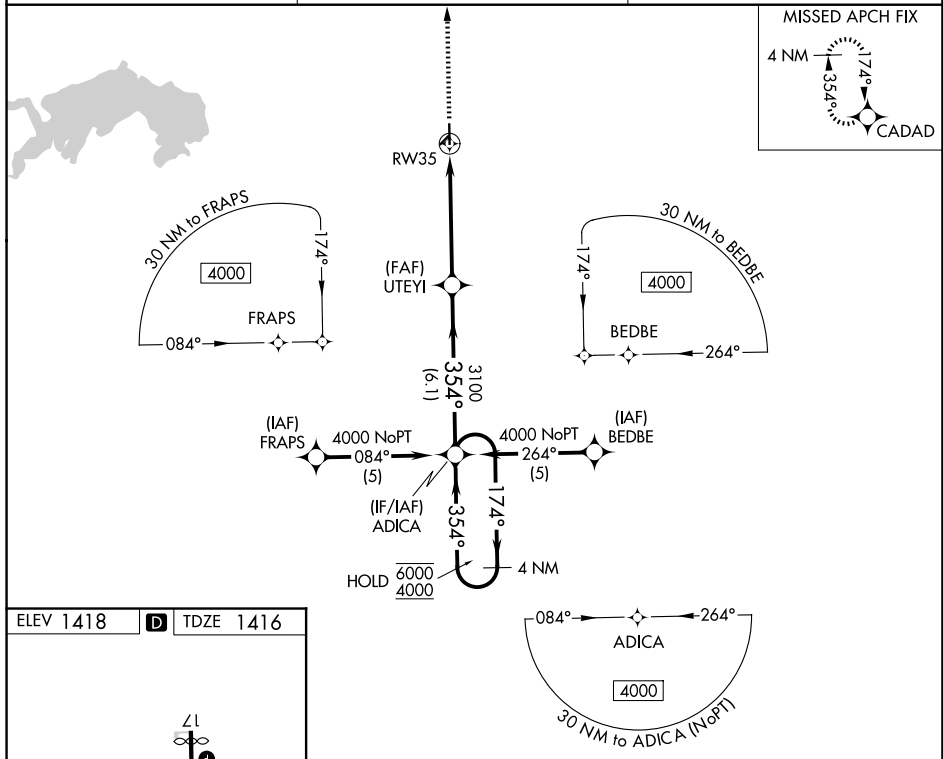


Diagram illustrating the RW35 holding pattern and associated navigation data.

Diagram Details:

- Initial Approach:** 170° turn from the initial approach.
- Pattern:** 354° turn, 174° turn, 354° turn.
- Radius:** 1.5 NM from RW35.
- Altitude:** 4000 MSL.
- Navigation Data:**

CATEGORY	A	B	C	D
LNAV MDA	1940-1	524 (600-1)	NA	NA
CIRCLING	1940-1 522 (600-1)	2260-1 1/4 842 (900-1 1/4)	NA	NA

BELOIT, KANSAS

Orig-B 04SEP25

39°28'N-98°08'W

MORITZ MEML (K61)

RNAV (GPS) RWY 35

NC-2, 25 DEC 2025 to 22 JAN 2026

NC-2, 25 DEC 2025 to 22 JAN 2026