


SALT LAKE CENTER
132.4 338.3

TAKEOFF MINIMUMS
Rwys 7, 17, 25: NA - Environmental.
Rwy 35: Standard.

NOTE: GPS required.
NOTE: RNAV 1.

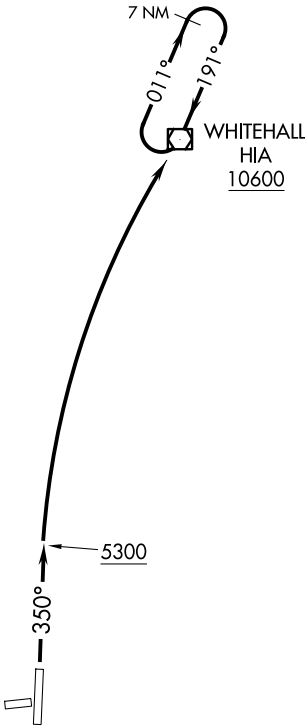

TAKEOFF OBSTACLE NOTES

- Rwy 35: Airfield light 10' from DER, 9' right of centerline, 2' AGL/4791' MSL.
Airfield light 10' from DER, 10' left of centerline, 2' AGL/4791' MSL.
Fence beginning 188' from DER, 296' right of centerline, up to 3' AGL/4807' MSL.
Pole 499' from DER, 607' left of centerline, 34' AGL/4808' MSL.
Vehicle on secondary road beginning 643' from DER, 492' right of centerline, 4817' MSL.
Vehicle on secondary road beginning 1193' from DER, 503' right of centerline, up to 4831' MSL.
Pole 1319' from DER, 612' right of centerline, 34' AGL/4849' MSL.
Pole 1431' from DER, 754' right of centerline, 30' AGL/4851' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 35: Climb on heading 350° to 5300, then climbing right turn direct HIA VOR/DME, continue climb in HIA VOR/DME holding pattern to cross HIA VOR/DME at or above 10600 before proceeding on course. Expect filed altitude five minutes after departure.