

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>50511</b><br><b>W28A</b> | APP CRS<br><b>276°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>6000</b><br><b>975</b><br><b>975</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|


RNAV (GPS) RWY 28

LIMA ALLEN COUNTY (AOH)

**⚠** Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). When local altimeter setting not received, use Findlay altimeter setting and increase LPV DA to 1255, LNAV/VNAV DA to 1477 and all MDAs 80 feet; increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cats C/D ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Findlay altimeter setting.

MISSED APPROACH:  
Climb to 3000 direct UCAYU and hold.

|                        |                                           |                                 |
|------------------------|-------------------------------------------|---------------------------------|
| ASOS<br><b>128.725</b> | COLUMBUS APP CON<br><b>121.825 323.15</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|------------------------|-------------------------------------------|---------------------------------|

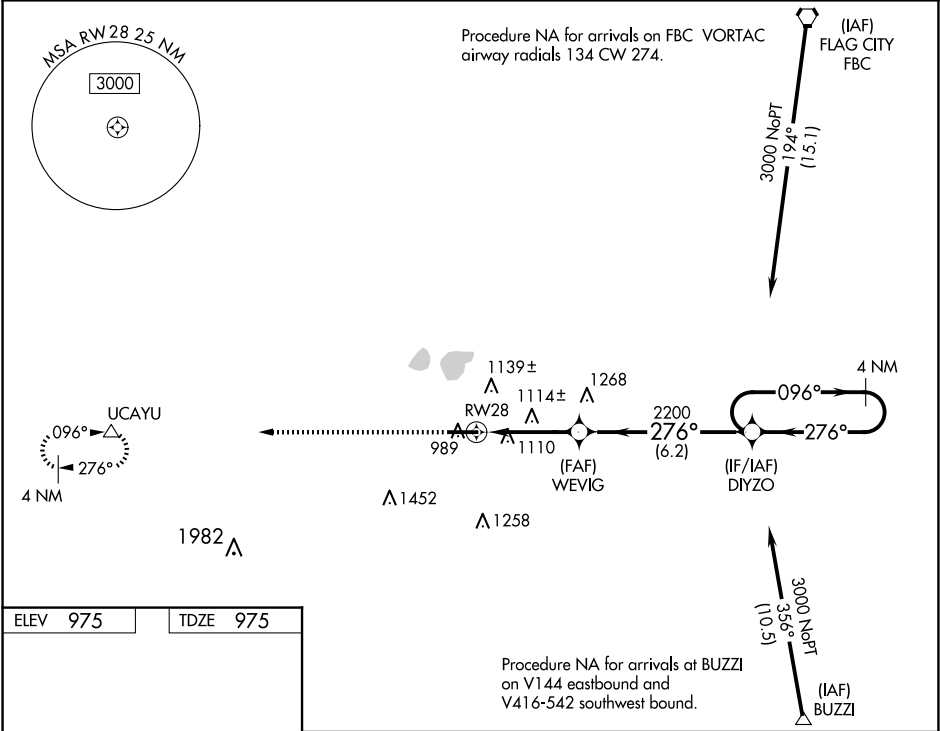

|          |          |
|----------|----------|
| ELEV 975 | TDZE 975 |
|----------|----------|

