


WAAS CH 69300 W05A	APP CRS 049°	Rwy Ldg TDZE 928 Apt Elev 928
--	------------------------	---

RNAV (GPS) RWY 5

BAXTER COUNTY (BPK)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct PUNTT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Procedure NA at night. Circling NA for Cat C southeast of Rwy 5-23. Rwy 5 helicopter visibility reduction below 1 SM NA.	

ASOS 133.975	MEMPHIS CENTER 126.85 281.55	UNICOM 123.0 (CTAF)
------------------------	--	-------------------------------

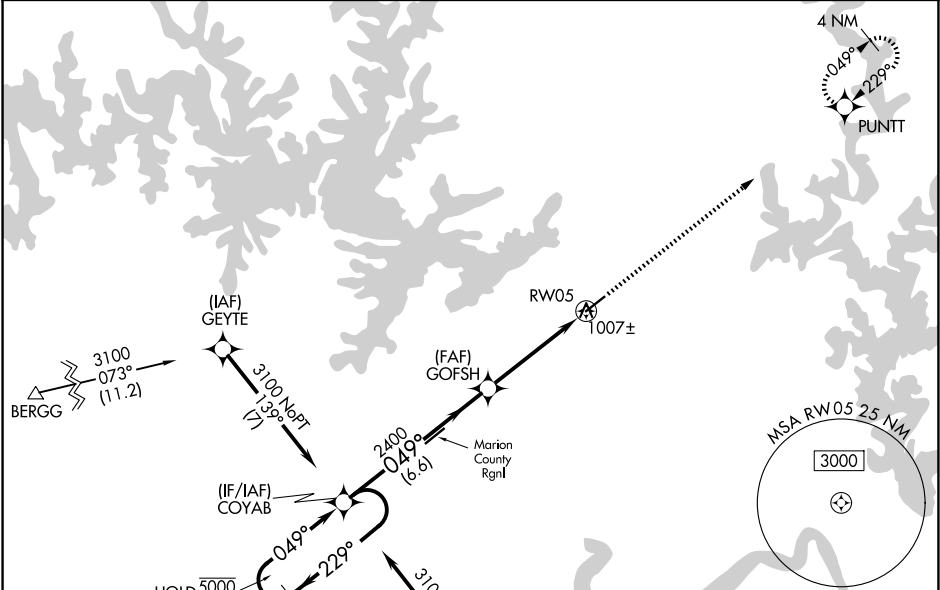

5 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI 3.00/TCH 38).		ELEV 928	TDZE 928
COYAB		GOFSH		PUNTT	
5000 ← 229°		2400		3000	
3100 → 049°		2400		3000	
GP 3.00°		2400		3000	
TCH 44		2400		3000	
6.6 NM		4.5 NM		0.5% UP	
CATEGORY	A	B	C	D	
LPV DA	1201-1	273 (300-1)		NA	
LNAV/VNAV DA	1250-1	322 (400-1)		NA	
LNAV MDA	1280-1	352 (400-1)		NA	
CIRCLING	1400-1	472 (500-1)	1460-1½ 532 (600-1½)	NA	