

WAAS CH 82723 W18A	APP CRS 183°	Rwy Idg 5008 TDZE 930 Apt Elev 930
--	------------------------	---



RNAV (GPS) RWY 18

POSEY FLD (1M4)

⚠ Circling Rwy 36 NA at night, Rwy 18 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Muscle Shoals altimeter setting; Increase LPV DA to 1298 feet, and LNAV/VNAV DA to 1354 feet and LNAV/VNAV visibility ¼ SM; increase all MDAs 120 feet and visibility LNAV Cats C and D ¼ SM; increase Circling Cat C visibility ½ SM and Cat D ¼ SM. Baro-VNAV NA when using Muscle Shoals altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Muscle Shoals altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
UKUPE and hold.

AWOS-3PT 119.525	MEMPHIS CENTER 120.8 307.0	UNICOM 122.8 (CTAF) 0
----------------------------	--------------------------------------	---------------------------------

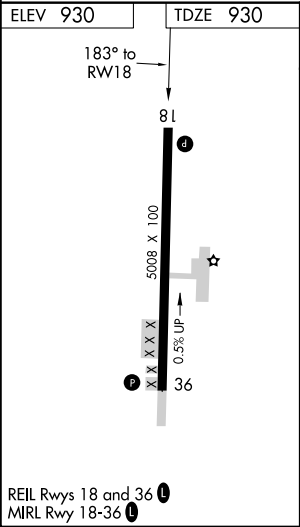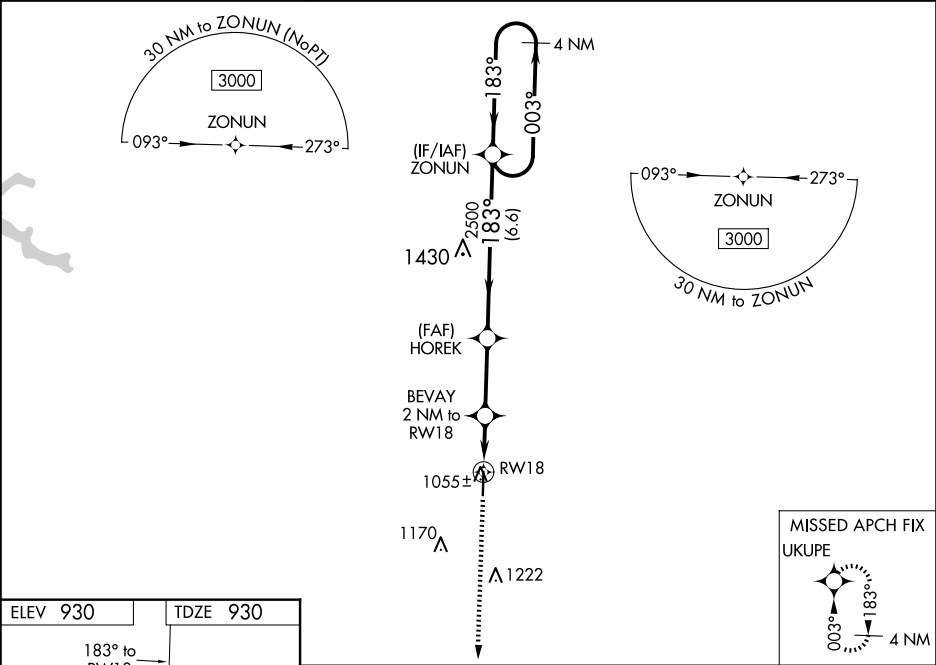

3000 UKUPE	BEVAY 2 NM to RW18	HOREK 2500	ZONUN 4 NM Holding Pattern	003° to 183°	3000	GP 3.00° TCH 49
*LNAV only.	*1.1 NM to RW18	1600*	2500	183°	183°	
1.1	0.9	2.8 NM	6.6 NM			
CATEGORY	A	B	C	D		
LPV DA		1180-1	250 (300-1)			
LNAV/VNAV DA		1236-1	306 (400-1)			
LNAV MDA	1320-1	390 (400-1)	1320-1½	390 (400-1½)		
CIRCLING	1380-1 450 (500-1)	1400-1 470 (500-1)	1520-1½ 590 (600-1½)	1540-2 610 (700-2)		